

# GF3 Glass fiber Ø 3 mm – Cable pulling system



Ergonomic holding and carrying handle

Guiding head with swivel and kink protection

Automatic glide back protection

Integrated digital meter counter – m/ft



Accessory and repair box (16-parts)

GF3 glass fiber rod available in lengths of 20 m, 30 m and 50 m

Anti-slip coating

Jobsite capable, splash water & dust proof, shock- and break-proof

Easy service access - open with a single screw

130 KG



**RUNPOTEC**  
CAMERA  
COMPATIBEL

**Front end:** Guiding head with swivel and RTG Ø 6 mm front thread and kink protection


**Rear end:** Kink protection with RTG Ø 6 mm inner thread

### Accessory box (16-parts)



### Extreme bending radius

Revolutionary kink protection

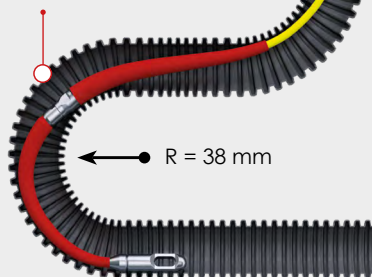

### Easy service opening / Accessory box



Rod	Rec. pipe diameter	Bending radius	Bending radius rod	Breaking load	Total breaking load
Ø					
3 mm	10 – 50 mm	38 mm	28 mm	450 kg	130 kg



Item  
**GF3 Glass fiber rod Ø 3 mm**  
with integrated digital meter counter – m/ft

Length	Item no.
20 m	10192
30 m	10193
50 m	10195